


COAXIAL CONNECTOR, SMA, 50 Ohm, Straight panel receptacle, jack (female), flange mount

23_SMA-50-0-13/111_N

Properties

- Excellent return loss
- Intermateable with PC3.5 and SK
- Applicable in frequencies up to 18 GHz

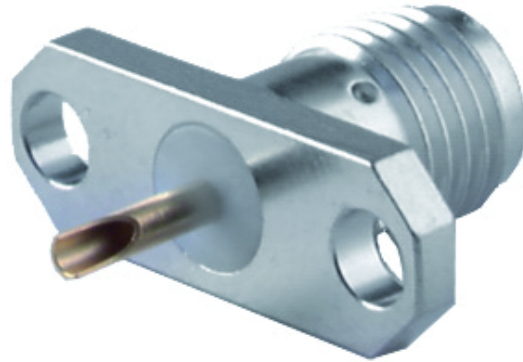

| Product configuration | | |
|-----------------------------|--------------------------|--|
| Interface type | Gender | Standard |
| SMA | jack | IEC 60169-15_MIL-STD-348A/310_CECC 22110 |
| Interface and material data | | |
| Piece parts | Material | Plating |
| Centre contact | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Outer conductor | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Body | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Insulator | PFA / PTFE | |
| Electrical data | | |
| Impedance | 50 Ω | |
| Interface frequency | 18 GHz | |
| Mechanical data | | |
| Weight | 0.0023 kg | |
| Mating cycles | 500 | |
| Flange type | 2-hole flange / 16 X 5.7 | |
| Tab style | Standard | |
| Environmental data | | |
| Operation temperature | -65 °C ... 125°C | |

COAXIAL CONNECTOR, SMA, 50 Ohm, Straight panel receptacle, jack (female), flange mount

23_SMA-50-0-13/111_N

| Ordering Information Table | | |
|----------------------------|-----------------------|----------------|
| Item number | Item description | Packaging type |
| 22640097 | 23_SMA-50-0-13/111_NE | Single |
| 22658873 | 23_SMA-50-0-13/111_NH | Bulk 100 pcs |

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2711 / Date of publication: 26.11.2023 / uncontrolled copy