



MHV Male to BNC Female Adapter

RF Adapters Technical Data Sheet

PE9297

Configuration

- MHV Male Connector 1
- BNC Female Connector 2
- 50 Ohm
- Straight Body Geometry

Features

- Max VSWR of 1.3:1 up to 300 MHz
- MHV interface compliant with MIL-STD-348A
- BNC interface compliant with MIL-STD-348A
- 30 µ-in minimum contact plating
- Gold Plated Brass Contact
- Max VSWR of 1.3:1 up to 300 MHz
- MHV Interface compliant with MIL-STD-348A
- Gold Plated Brass Contact
- 30 µ-in min Gold Contact Plating

Applications

- Allows Connection Between Series
- Connector Saver
- General Purpose Test
- General Purpose Test

Description

Pasternack's PE9297 MHV male to BNC female adapter is part of our full line of RF components available for same-day shipping. Our MHV to BNC adapter has a male to female gender configuration. PE9297 MHV male to BNC female adapter operates to 300 MHz. The Pasternack RF adapter provides good VSWR of 1.3:1 maximum. Pasternack's PE9297 MHV female to MHV male adapter is part of our full line of RF components available for same-day shipping. Our MHV to MHV adapter has a female to male gender configuration. PE9297 MHV female to MHV male adapter operates to 300 MHz. The Pasternack RF adapter provides good VSWR of 1.3:1 maximum. The PE9297 Pasternack RF adapter can also be used as a connector saver to extend equipment life.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR			1.3:1	
Operating Voltage (AC)			1,600	Vrms
Dielectric Withstanding Voltage (AC)			5,000	Vrms

Mechanical Specifications

Size

Length 1.535 in [38.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MHV Male to BNC Female Adapter PE9297](#)



MHV Male to BNC Female Adapter

RF Adapters Technical Data Sheet

PE9297

Width 0.571 in [14.5 mm]
Weight 0.037 lbs [16.78 g]

Description	Connector 1	Connector 2
Type	MHV Male	BNC Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	MHV Male		BNC Female	
Contact	Brass	Gold 30 µ-in minimum	Brass	Gold 30 µ-in minimum
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Nickel 100 µ-in minimum
Body			Brass	Nickel 100 µ-in minimum
Coupling Nut	Brass	Nickel 100 µ-in minimum		

Environmental Specifications

Temperature

Operating Range -65 to 165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MHV Male to BNC Female Adapter PE9297](#)



MHV Male to BNC Female Adapter

RF Adapters Technical Data Sheet

PE9297


MHV Male to BNC Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MHV Male to BNC Female Adapter PE9297](https://www.pasternack.com/bnc-female-mhv-male-straight-adapter-pe9297-p.aspx)

URL: <https://www.pasternack.com/bnc-female-mhv-male-straight-adapter-pe9297-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9297 CAD Drawing
MHV Male to BNC Female Adapter

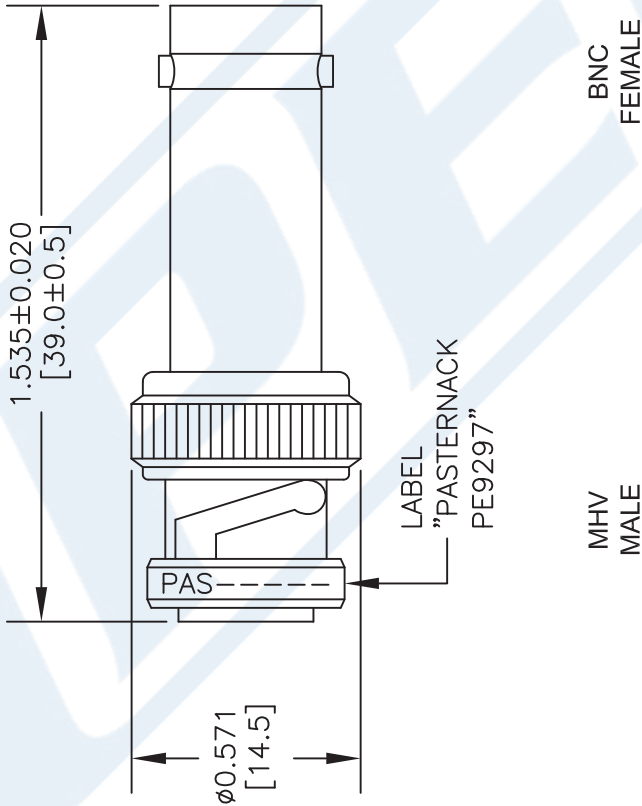

STANDARD TOLERANCES			
.X	±0.2		
.XX	±0.1		
.XXX	±0.05		

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<div><div><div><div>PASTERNAK®</div><div>THE ENGINEER'S RF SOURCE</div></div></div><div><div>Pasternack Enterprises, Inc.</div><div>P.O. Box 16759 Irvine CA 92623</div><div>Phone: (949) 261-1920 Fax: (949) 261-7451</div><div>Website: www.pasternack.com E-Mail: sales@pasternack.com</div></div></div>					DWG TITLE		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].	
		PE9297						
CAGE CODE 53919		CAD FILE 060217	SCALE N/A	SIZE A	2233			